



ATORLED5

Tornado IP65 LED Non-Corrosive 28W Grey



Features

LED Performance allows point-to-point replacement of existing fluorescent luminaires.

Light output exceeds performance of T8 and T5 fluorescent.

Unique luminaire fixing clip design allows option of mounting onto BESA box.

Lockable heavy-duty stainless steel clips supplied as standard for added safety and security.

Self-test emergency as standard.

LED lifespan L70 30,000 hours

Non-dimmable.

General Information

Lamp Type	LED
Colour / Finish	Grey
IP Rating	IP65
Class Protection	1
Internal / External	Internal/External
Surface / Recessed / Suspended	Surface
Warranty (Years)	5
CE Mark	Yes
Length (mm)	1566
Width (mm)	85
Height (mm)	75

Technical Information

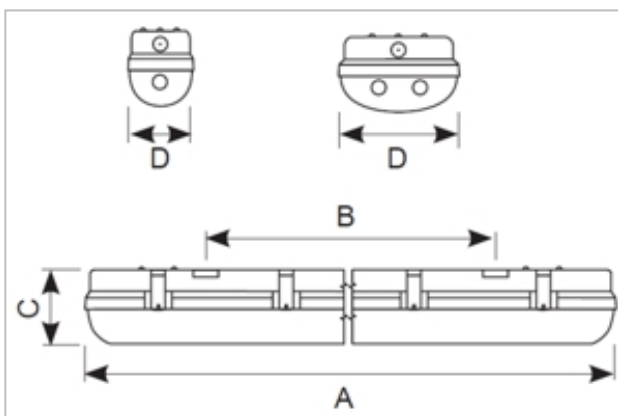
Wattage	28W
Lumens Delivered	3230lm
Lm/W	115 Lm/W
CRI	Ra 80
CCT	4000K
Input	230V
Hertz	50Hz
Operating Temp	-10°C to 40°C

Technical Data - ETIM 6 - Ceiling-/wall luminaire (EC002892)

Suitable for wall mounting	Yes
Suitable for suspended mounting	Yes
Suitable for ceiling mounting	Yes
Suitable for surface mounting	Yes
With light source	Yes
Suitable for number of lamps	1
Lamp power at multiwatt	Not applicable
Control gear included	Yes
Type of dimming	Not dimmable
Suitable for emergency lighting	No
Nominal voltage	230-230 V
Colour temperature	4000-4000 K
Colour housing	Grey
Suitable for light line configuration	No
Type of grid	None
Length	1566 mm
Width	85 mm
Height/depth	75 mm
With movement sensor	No
With light sensor	No
Protection class	I
Degree of protection (IP)	IP65
Ambient temperature	-10-40 °C
Max. system power	28 W
Rated luminous flux acc. IEC 62722-2-1	3230 lm

Colour of light White

Colour rendering index CRI 80-89

	Code	A	B	C	D
	ATORLED4	1266	860	75	85
	ATORLED5	1566	960	75	85
	ATORLED6	1866	1030	80	85
	ATORLED2X4	1266	860	75	118
	ATORLED2X5	1566	960	75	118
	ATORLED2X6	1855	1030	80	118

Datasheet generated from <https://www.electrika.com> last updated Thursday, March 21, 2019 1:54:38 PM